

Quadra-Chek 300 Series

The QC-300 features an enhanced touch-screen interface and patented Measure Magic® technology. It is ideal for the measurement of 2D features and can be used with inspection tools such as profile projectors and video systems. All QC-300 Series models include parallel, serial and USB ports for use with printers and on networks.




Specifications

| | |
|-----------------------|-------------------------------|
| LCD | 8.4" colour touch screen SVGA |
| Resolution Down To | .0001mm or .000004" |
| Operating Temperature | 0°C - 45°C |
| Enclosure (W x H x D) | 290mm x 190mm x 70mm |
| Base (W x H x D) | 250mm x 50mm x 190mm |
| Enclosure Weight | 3.5lbs |
| Base Weight | 7lbs |
| Input Voltage Range | 85VAC - 264VAC |
| Input Frequency | 43Hz - 63Hz |

Input

| |
|-----------------------|
| Up to 4 axes |
| External connections: |
| Footswitch |
| Remote Keypad |
| RS-232C Serial Port |
| Parallel Port |
| USB |
| Ethernet |

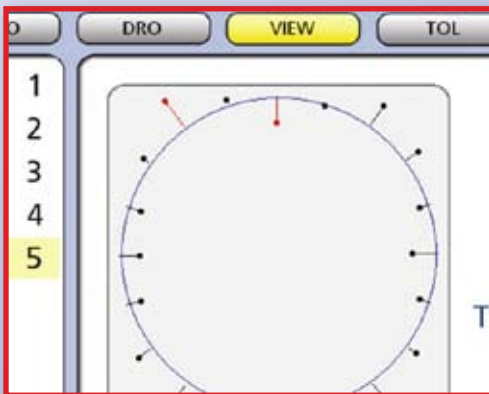

Results View Graphic representation of the data cloud with errors. Feature measurement results and fit type.

| Tolerance : MMC | | |
|-----------------|----------|----------|
| | Nominal | Actual |
| X | 34.5678 | 34.5690 |
| Y | -21.0923 | -21.0920 |
| Z | | 4.0630 |
| Nominal Actual | | |
| | 4.0625 | 4.0568 |

Tolerance Displays Translates data-intensive reports into visual displays that are readable at a glance.



Automatic Video Edge Detection For improved throughput and accuracy.

Contact us at
sales@starrett-precision.co.uk

Visit us at
www.starrett-precision.co.uk